

 250 kg

 65 kg



Equipo ligero con rotación manual 360° y basculación eléctrica 0° - 90°, especialmente indicado para procesos de manipulación de vidrio en vertical y horizontal como trabajos en canteadoras, CNC verticales y horizontales, lavadoras verticales y horizontales, hornos de templar, manipulación y ensamblaje de puertas y ventanas, mesas de corte...

El plato central rectangular proporciona una gran succión lo que permite cargar hasta 250 Kg. Añadiendo las extensiones permite aumentar la superficie de agarre para hojas de mayor tamaño y capacidad hasta 400Kg.

*Light equipment with 360° manual rotation and 0° - 90° electric tilting, especially suitable for vertical and horizontal glass handling processes such as edger machines, vertical and horizontal CNCs, vertical and horizontal washing machines, tempering furnaces, handling and assembly of doors and windows, cutting tables ...*

*It works only with electricity and the tilting is smooth, precise to speed up the operator's work and increase efficiency.*

 90° - 180° - 270° - 360°

 0° - 90°

 83 L/min





 OK

 480 W

 200 - 500 VAC (50 - 60 Hz)

 —

 4.0 OK



 400 kg

 77 kg



Equipo ligero con rotación manual 360° y basculación eléctrica 0° - 90°, especialmente indicado para procesos de manipulación de vidrio en vertical y horizontal como trabajos en canteadoras, CNC verticales y horizontales, lavadoras verticales y horizontales, hornos de templar, manipulación y ensamblaje de puertas y ventanas, mesas de corte...

El plato central rectangular proporciona una gran succión lo que permite cargar hasta 250 Kg. Añadiendo las extensiones permite aumentar la superficie de agarre para hojas de mayor tamaño y capacidad hasta 400Kg.

*Light equipment with 360° manual rotation and 0° - 90° electric tilting, especially suitable for vertical and horizontal glass handling processes such as edger machines, vertical and horizontal CNCs, vertical and horizontal washing machines, tempering furnaces, handling and assembly of doors and windows, cutting tables ...*

*It works only with electricity and the tilting is smooth, precise to speed up the operator's work and increase efficiency.*

 90° - 180° - 270° - 360°

 0° - 90°

 83 L/min


 OK

 480 W

 200 - 500 VAC (50 - 60 Hz)

 —

 4.0 OK

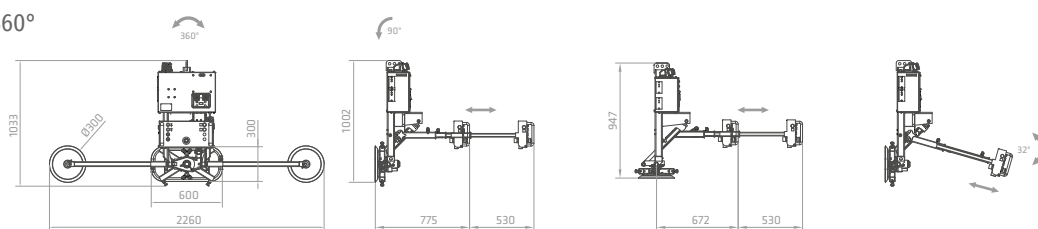

 400 kg

 85 kg



Equipo ligero con rotación manual 360° y basculación eléctrica 0° - 90°, especialmente indicado para procesos de manipulación de vidrio en vertical y horizontal como trabajos en canteadoras, CNC verticales y horizontales, lavadoras verticales y horizontales, hornos de templar, manipulación y ensamblaje de puertas y ventanas, mesas de corte...

El plato central rectangular proporciona una gran succión lo que permite cargar hasta 250 Kg. Añadiendo las extensiones permite aumentar la superficie de agarre para hojas de mayor tamaño y capacidad hasta 400Kg.

*Light equipment with 360° manual rotation and 0° - 90° electric tilting, especially suitable for vertical and horizontal glass handling processes such as edger machines, vertical and horizontal CNCs, vertical and horizontal washing machines, tempering furnaces, handling and assembly of doors and windows, cutting tables ...*

*It works only with electricity and the tilting is smooth, precise to speed up the operator's work and increase efficiency.*

 90° - 180° - 270° - 360°

 0° - 90°

 83 L/min

 OK

 480 W

 200 - 500 VAC (50 - 60 Hz)

 —

 4.0 OK

