

 1500 kg

 844 kg



Equipo ligero especialmente indicado para procesos de manipulación de vidrio en vertical y horizontal como trabajos en canteadoras, CNC verticales y horizontales, lavadoras verticales y horizontales, hornos de templar, manipulación y ensamblaje de puertas y ventanas, mesas de corte...

Mayor capacidad de carga que las gamas de hasta 400kg para poder manipular vidrios que cada vez son más pesados. Indicado para grúas Tecnocat de 1000kg o para puente grúa.

*Tilting vacuum equipment with a motion range of 0° to 90° and electric power supply, specially designed for horizontal glass handling processes such as horizontal CNC machines, laminators, tempering furnaces, cutting tables, and more. Its quick and precise movement ensures ergonomic and efficient operation.*

*This equipment has a load capacity of up to 1,500 kg and can handle glass dimensions up to 9 x 3.21 meters. It includes extensions that provide an additional level of safety when handling large-format pieces. Optionally, the equipment can be equipped with a load leveling and tilting system, further enhancing efficiency in managing large glass panels.*



OK



0° - 90°



3 m.



166 L/min



480 W



OPTIONAL





200 - 500 VAC (50 - 60 Hz)



OK



OK

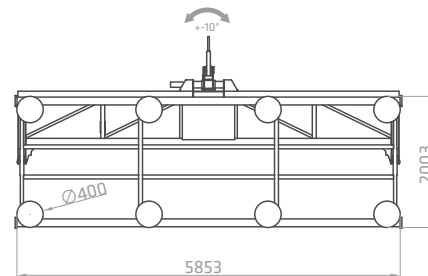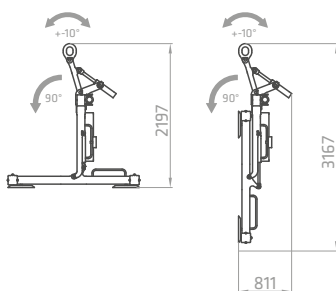

 1500 kg

 1000 kg



Equipo ligero especialmente indicado para procesos de manipulación de vidrio en vertical y horizontal como trabajos en canteadoras, CNC verticales y horizontales, lavadoras verticales y horizontales, hornos de templar, manipulación y ensamble de puertas y ventanas, mesas de corte...

Mayor capacidad de carga que las gamas de hasta 400kg para poder manipular vidrios que cada vez son más pesados. Indicado para grúas Tecnocat de 1000kg o para puente grúa.

*Tilting vacuum equipment with a motion range of 0° to 90° and electric power supply, specially designed for horizontal glass handling processes such as horizontal CNC machines, laminators, tempering furnaces, cutting tables, and more. Its quick and precise movement ensures ergonomic and efficient operation.*

*This equipment has a load capacity of up to 1,500 kg and can handle glass dimensions up to 9 x 3.21 meters. It includes extensions that provide an additional level of safety when handling large-format pieces. Optionally, the equipment can be equipped with a load leveling and tilting system, further enhancing efficiency in managing large glass panels.*

 OK

 0° - 90°

 3 m.

 166 L/min

 480 W

 OPTIONAL

 200 - 500 VAC (50 - 60 Hz)

 OK

 OK

