



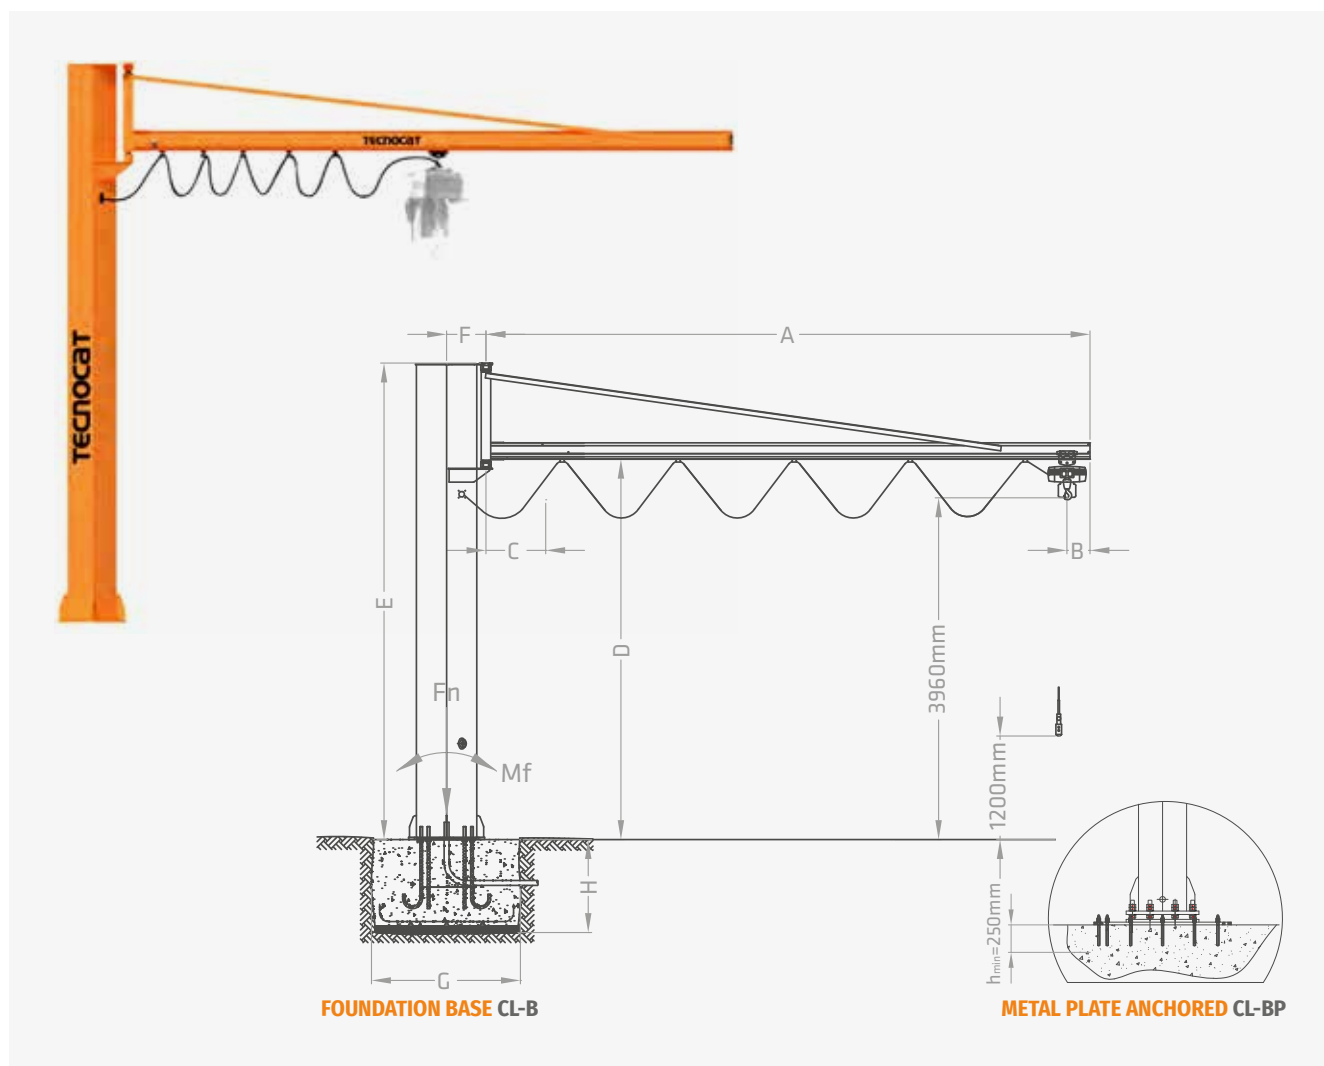

			A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Mf (kNm)	Fn (kN)
CL-B4-500	500 kg	270°	4000	140	932	4400	5250	350	1600	900	35,2	14,4
CL-B5-500	500 kg	270°	5000	140	932	4400	5250	350	1700	900	43,4	14,7
CL-B6-500	500 kg	270°	5795	140	932	4400	5250	350	1900	1100	50,9	14,9
CL-B7-500	500 kg	270°	7000	140	1080	4400	5520	455	2000	1100	62,5	17,7

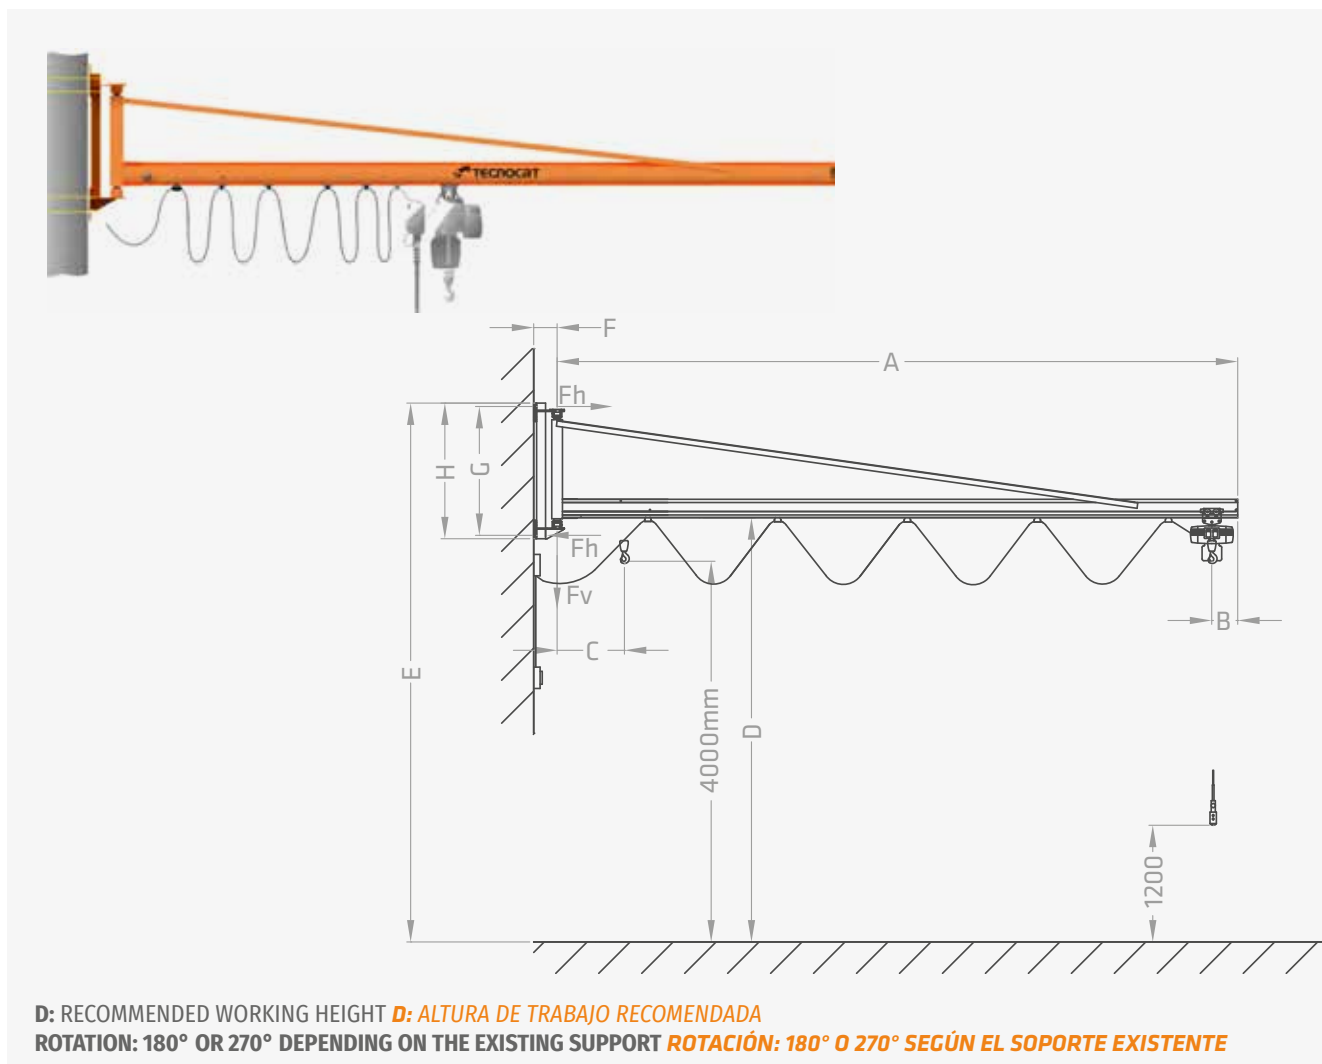

			A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Fh (kN)	Fv (kN)
ML-B4-500	500 kg	180°	4000	140	932	4470	5360	240	1025	30,9	9,7
ML-B5-500	500 kg	180°	5000	140	932	4470	5360	240	1025	38,8	9,9
ML-B6-500	500 kg	180°	5795	140	932	4470	5360	240	1025	46,1	10,2
ML-B7-500	500 kg	180°	7000	140	1080	4480	5660	240	1325	44	11,1