


 1500 kg


 750 kg

 225 kg



OPTIONAL:
BALANCE DEVICE
(+5° TO -5°)

OPCIONAL:
DISPOSITIVO DE EQUILIBRIO
(+5° A -5°)



OPTIONAL:
TILTING DEVICE
(+10° TO -10°)

OPCIONAL:
DISPOSITIVO DE INCLINACIÓN
(+10° A -10°)

El propósito del equipo de ventosas VF4 es disponer del equipo perfectamente adecuado para trabajar en líneas de producción de vidrio cámara, focalizando su uso en el proceso de salida del vidrio doble.

El modelo VF4 destaca por disponer, además de los platos de ventosa, dos apoyos inferiores para el vidrio. Estos dos apoyos inferiores son regulables en altura y en fondo, lo que permita adaptar de forma fácil la VF4 al formato de vidrio cámara en cada momento requerido. La medida entre apoyos puede variar y se realizará según las medidas proporcionadas.

The purpose of the VF4 vacuum equipment is to have an equipment perfectly suitable for working on double glazing production lines, focusing its use on the exit of double glass process.

The VF4 model stands out for having, in addition to the suction cups, two lower supports for the glass. These two lower supports are adjustable in height and depth, allowing the VF4 to be easily adapted to the IG glass format required. The measurement between supports may vary and will be carried out according to the measures provided.

 OK

 450 W



 3 m

 OPTIONAL

 200 - 500 VAC (50 - 60 Hz) + 24 VDC

 80 L/min


 OK

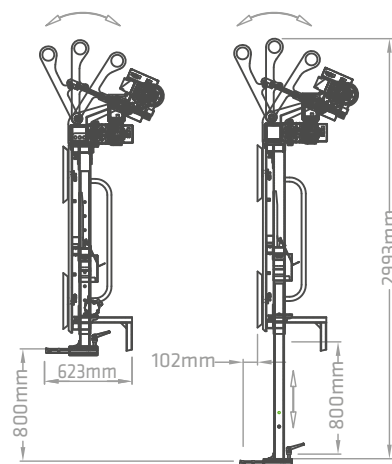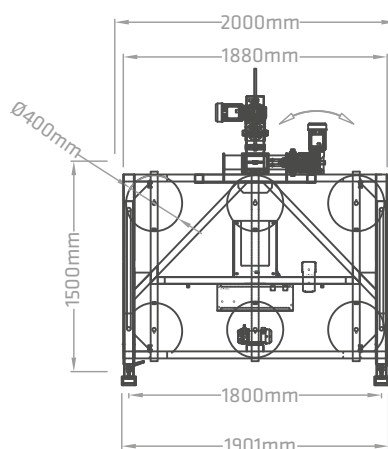

 1500 kg


 750 kg

 225 kg



OPTIONAL:
BALANCE DEVICE
(+5° TO -5°)

OPCIONAL:
DISPOSITIVO DE EQUILIBRIO
(+5° A -5°)



OPTIONAL:
TILTING DEVICE
(+10° TO -10°)

OPCIONAL:
DISPOSITIVO DE INCLINACIÓN
(+10° A -10°)

El propósito del equipo de ventosas VF4 es disponer del equipo perfectamente adecuado para trabajar en líneas de producción de vidrio cámara, focalizando su uso en el proceso de salida del vidrio doble.

El modelo VF4 destaca por disponer, además de los platos de ventosa, dos apoyos inferiores para el vidrio. Estos dos apoyos inferiores son regulables en altura y en fondo, lo que permita adaptar de forma fácil la VF4 al formato de vidrio cámara en cada momento requerido. La medida entre apoyos puede variar y se realizará según las medidas proporcionadas.

The purpose of the VF4 vacuum equipment is to have an equipment perfectly suitable for working on double glazing production lines, focusing its use on the exit of double glass process.

The VF4 model stands out for having, in addition to the suction cups, two lower supports for the glass. These two lower supports are adjustable in height and depth, allowing the VF4 to be easily adapted to the IG glass format required. The measurement between supports may vary and will be carried out according to the measures provided.

 OK

 450 W

 3 m

 OPTIONAL

 200 - 500 VAC (50 - 60 Hz) + 24 VDC

 80 L/min

 OK

