

 400 kg

 72 kg



Equipo ligero con rotación neumática 0° - 90° y basculación neumática 0° - 90° especialmente indicado para procesos de manipulación de vidrio en vertical y horizontal como canteadoras, CNC horizontales, laminadoras, hornos de templar, ensamble horizontal de puertas y ventanas, mesas de corte...

Los cuatro platos centrales proporcionan una gran succión lo que permite cargar hasta 400Kg, añadiendo las extensiones (modelo VN6-GB4+4) permite aumentar la superficie de agarre para hojas de mayor tamaño.

*Light equipment with manual rotation 0° - 90° and pneumatic tilting 0° - 90° indicated for vertical and horizontal glass handling processes, such as edger machines, vertical or horizontal CNC machines, laminate glass machines, tempering furnaces, horizontal assembly of doors and windows, cutting tables ...*

*Four central vacuum cups provides great suction which allows loading up to 400Kg. Adding the extensions (model VN6-GB4+4) allows to increase the grip surface for larger sheets.*




 7 bar 100 l/min

 0° - 90°

 0° - 90°

 OK

 40 L/min

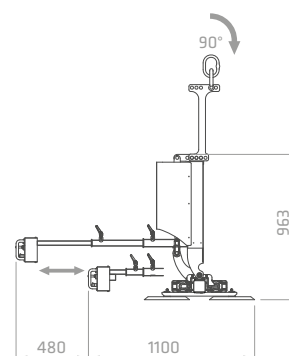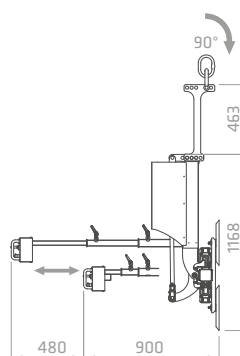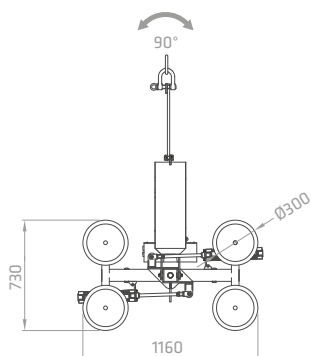



 400 kg

 94 kg

Equipo ligero con rotación neumática 0° - 90° y basculación neumática 0° - 90° especialmente indicado para procesos de manipulación de vidrio en vertical y horizontal como canteadoras, CNC horizontales, laminadoras, hornos de templar, ensamblaje horizontal de puertas y ventanas, mesas de corte...

Los cuatro platos centrales proporcionan una gran succión lo que permite cargar hasta 400Kg, añadiendo las extensiones (modelo VN6-GB4+4) permite aumentar la superficie de agarre para hojas de mayor tamaño.

*Light equipment with manual rotation 0° - 90° and pneumatic tilting 0° - 90° indicated for vertical and horizontal glass handling processes, such as edger machines, vertical or horizontal CNC machines, laminate glass machines, tempering furnaces, horizontal assembly of doors and windows, cutting tables ...*

*Four central vacuum cups provides great suction which allows loading up to 400Kg. Adding the extensions (model VN6-GB4+4) allows to increase the grip surface for larger sheets.*

 7 bar 100 l/min

 0° - 90°

 0° - 90°

 OK

 40 L/min

