

 600 kg

 140 kg



Equipo de vacío basculante de 0° a 90° con alimentación neumática especialmente indicado para procesos de manipulación de vidrio en horizontal como CNC horizontales, laminadoras, hornos de templar, mesas de corte, etc. El movimiento es rápido y preciso contribuyendo a que el trabajo se ergonómico y eficiente.

Tiene una capacidad de carga de 600kg y cuenta con extensiones que le aportan un extra de seguridad a la hora de manipular piezas de gran formato.

Los mandos de control se posicionan de manera automática al bascular para mayor seguridad.

*Tilting vacuum equipment from 0° to 90° with pneumatic power supply, specifically designed for horizontal glass handling processes such as horizontal CNC machines, laminators, tempering furnaces, cutting tables, and more. Its quick and precise movement ensures ergonomic and efficient operation.*

*With a load capacity of 600 kg, it is equipped with extensions that provide additional safety when handling large-format pieces.*




*The control handles automatically adjust their position during tilting for enhanced safety.*

 7 bar 100 l/min

 0° - 90°

 OK

 40 L/min

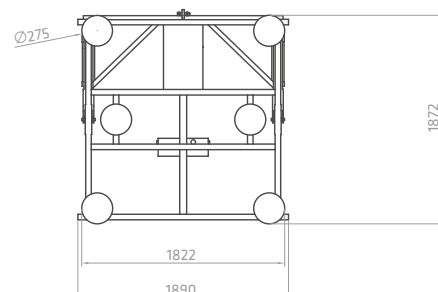

 600 kg

 160 kg



Equipo de vacío basculante de 0° a 90° con alimentación neumática especialmente indicado para procesos de manipulación de vidrio en horizontal como CNC horizontales, laminadoras, hornos de templar, mesas de corte, etc. El movimiento es rápido y preciso contribuyendo a que el trabajo se ergonómico y eficiente.

Tiene una capacidad de carga de 600kg y cuenta con extensiones que le aportan un extra de seguridad a la hora de manipular piezas de gran formato.

Los mandos de control se posicionan de manera automática al bascular para mayor seguridad.

*Tilting vacuum equipment from 0° to 90° with pneumatic power supply, specifically designed for horizontal glass handling processes such as horizontal CNC machines, laminators, tempering furnaces, cutting tables, and more. Its quick and precise movement ensures ergonomic and efficient operation.*

*With a load capacity of 600 kg, it is equipped with extensions that provide additional safety when handling large-format pieces.*

*The control handles automatically adjust their position during tilting for enhanced safety.*

 7 bar 100 l/min

 0° - 90°

 OK

 40 L/min

