

 200 kg

 47 kg

VNL-G2 COMPATIBLE WITH: CML-B4

- * HOIST NOT REQUIRED
- * ELEVATION BY MEANS OF PNEUMATIC PISTON



Equipo ligero y compacto, indicado para procesos de manipulación de vidrio en vertical. Muy adecuado para trabajos en canteadoras, CNC verticales, lavadoras verticales, manipulación y ensamblaje de puertas y ventanas...

Funciona sólo con aire a presión y el giro neumático es rápido y preciso para agilizar el trabajo del operario e incrementar eficiencia.

No requiere polipasto ya que dispone de pistón de elevación propio.

Equipo perfecto para combinar con sistema de elevación CML-B4 TECNOCAT.

Light and compact equipment, indicated for vertical glass handling processes. Very suitable for work in edging machines, vertical CNC, vertical washing machines, handling and assembly of doors and windows ...

It works only with compressed air and the pneumatic rotation is fast and precise to speed up the operator's work and increase efficiency.


It doesn't require hoist due to it has its own elevation piston.

Perfect equipment to combine with the CML-B4 TECNOCAT lifting system.

 7 bar - 200 l/min

 40 L/min

 0° - 90°

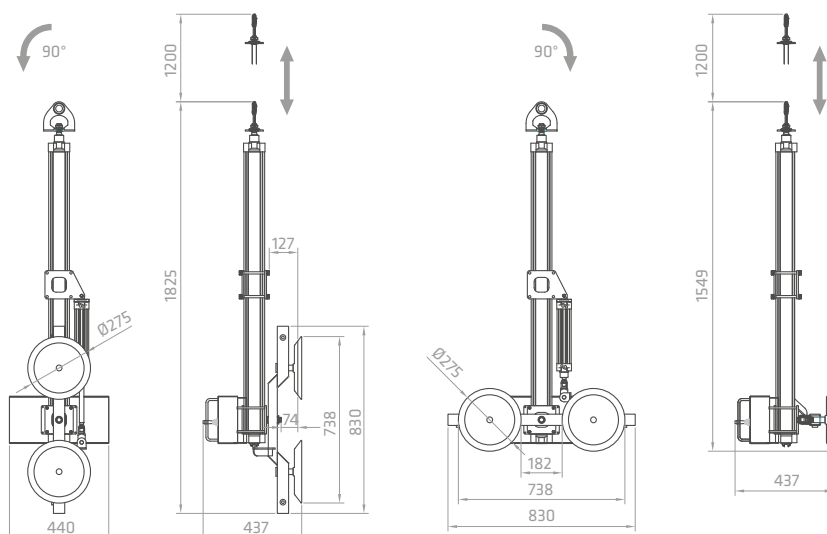

 200 kg

 55 kg

VNL-G2 COMPATIBLE WITH: CML-B4

- * HOIST NOT REQUIRED
- * ELEVATION BY MEANS OF PNEUMATIC PISTON



Equipo ligero y compacto, indicado para procesos de manipulación de vidrio en vertical. Muy adecuado para trabajos en canteadoras, CNC verticales, lavadoras verticales, manipulación y ensamblaje de puertas y ventanas...

Funciona sólo con aire a presión y el giro neumático es rápido y preciso para agilizar el trabajo del operario e incrementar eficiencia.

No requiere polipasto ya que dispone de pistón de elevación propio.

Equipo perfecto para combinar con sistema de elevación CML-B4 TECNOCAT.

Light and compact equipment, indicated for vertical glass handling processes. Very suitable for work in edging machines, vertical CNC, vertical washing machines, handling and assembly of doors and windows ...

It works only with compressed air and the pneumatic rotation is fast and precise to speed up the operator's work and increase efficiency.

It doesn't require hoist due to it has its own elevation piston.

Perfect equipment to combine with the CML-B4 TECNOCAT lifting system.

 7 bar - 200 l/min

 40 L/min

 0° - 90°

