

 1000 kg

 500 kg

 180 kg



tecnocat
Modular Design

Es un equipo totalmente modular y puede montar diferentes parrillas para vidrios de distintos pesos y dimensiones pudiendo llegar hasta los 1500kg.

También admite parrillas para vidrio curvo, es decir con un solo equipo se puede trabajar en función de casi cualquier demanda y especificación.

Dispone de doble circuito de vacío de seguridad para la manipulación e instalación de vidrio en obra, según la norma EN-13155.

This is a totally modular equipment and can assemble different grids for glass of different weights and dimensions up to 1500kg. It also supports curved glass grills, in other words, with a single unit you can work with almost any demand and specification. It has a double safety vacuum circuit for the handling and installation of glass on site, according to the EN-13155 standard.

Battery-operated and can also be powered from the main power supply, it has a 360° endless electric motorized rotation capacity and 0°-90° hydraulic motorized tilting, both of which are very useful for daily on-site installation work and can be used to compensate for any movement required in a very convenient.

 OK

 150 W

 0° - 360° - ENDLESS

 3 m


 OK

 220-240VAC (50-60Hz)

 83 L/min

 0° - 90°

 OK - Running period 12h aprox

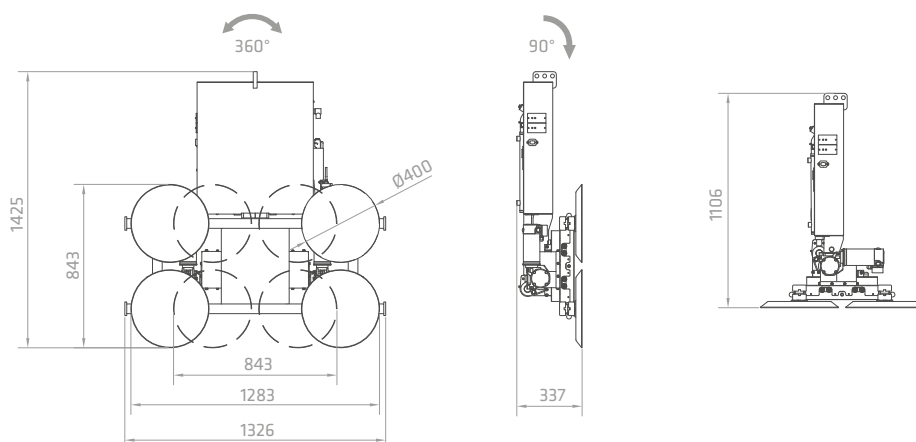

 1500 kg

 1000 kg

 210 kg



tecnocat
Modular Design



Es un equipo totalmente modular y puede montar diferentes parrillas para vidrios de distintos pesos y dimensiones pudiendo llegar hasta los 1500kg.

También admite parrillas para vidrio curvo, es decir con un solo equipo se puede trabajar en función de casi cualquier demanda y especificación.

Dispone de doble circuito de vacío de seguridad para la manipulación e instalación de vidrio en obra, según la norma EN-13155.

This is a totally modular equipment and can assemble different grids for glass of different weights and dimensions up to 1500kg. It also supports curved glass grills, in other words, with a single unit you can work with almost any demand and specification. It has a double safety vacuum circuit for the handling and installation of glass on site, according to the EN-13155 standard.

Battery-operated and can also be powered from the main power supply, it has a 360° endless electric motorized rotation capacity and 0°-90° hydraulic motorized tilting, both of which are very useful for daily on-site installation work and can be used to compensate for any movement required in a very convenient.

 OK

 150 W

 0° - 360° - ENDLESS

 3 m


 OK

 220-240VAC (50-60Hz)

 83 L/min

 0° - 90°

 OK - Running period 12h aprox

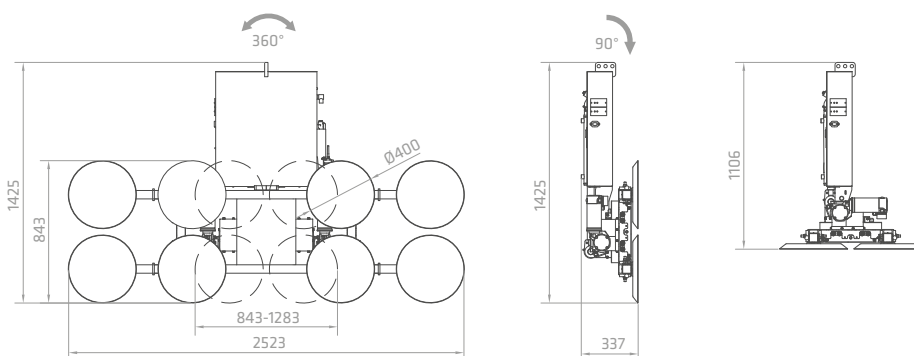

 1500 kg

 1500 kg

 270 kg



tecnocat
Modular Design



Es un equipo totalmente modular y puede montar diferentes parrillas para vidrios de distintos pesos y dimensiones pudiendo llegar hasta los 1500kg.

También admite parrillas para vidrio curvo, es decir con un solo equipo se puede trabajar en función de casi cualquier demanda y especificación.

Dispone de doble circuito de vacío de seguridad para la manipulación e instalación de vidrio en obra, según la norma EN-13155.

This is a totally modular equipment and can assemble different grids for glass of different weights and dimensions up to 1500kg. It also supports curved glass grills, in other words, with a single unit you can work with almost any demand and specification. It has a double safety vacuum circuit for the handling and installation of glass on site, according to the EN-13155 standard.

Battery-operated and can also be powered from the main power supply, it has a 360° endless electric motorized rotation capacity and 0°-90° hydraulic motorized tilting, both of which are very useful for daily on-site installation work and can be used to compensate for any movement required in a very convenient.

 OK

 150 W

 0° - 360° - ENDLESS

 3 m


 OK

 220-240VAC (50-60Hz)

 83 L/min

 0° - 90°

 OK - Running period 12h aprox

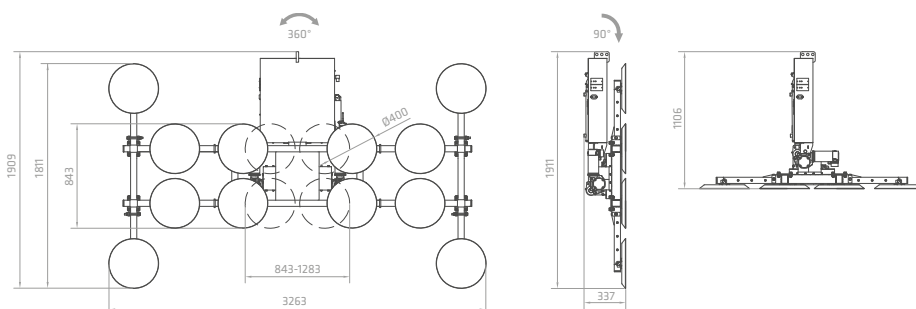

 400 kg

 400 kg

 210 kg



tecnocat
Modular Design

Es un equipo totalmente modular y puede montar diferentes parrillas para vidrios de distintos pesos y dimensiones pudiendo llegar hasta los 1500kg.

También admite parrillas para vidrio curvo, es decir con un solo equipo se puede trabajar en función de casi cualquier demanda y especificación.

Dispone de doble circuito de vacío de seguridad para la manipulación e instalación de vidrio en obra, según la norma EN-13155.

This is a totally modular equipment and can assemble different grids for glass of different weights and dimensions up to 1500kg. It also supports curved glass grills, in other words, with a single unit you can work with almost any demand and specification. It has a double safety vacuum circuit for the handling and installation of glass on site, according to the EN-13155 standard.

Battery-operated and can also be powered from the main power supply, it has a 360° endless electric motorized rotation capacity and 0°-90° hydraulic motorized tilting, both of which are very useful for daily on-site installation work and can be used to compensate for any movement required in a very convenient.

 OK

 150 W

 0° - 360° - ENDLESS

 3 m


 OK

 220-240VAC (50-60Hz)

 83 L/min

 0° - 90°

 OK - Running period 12h aprox

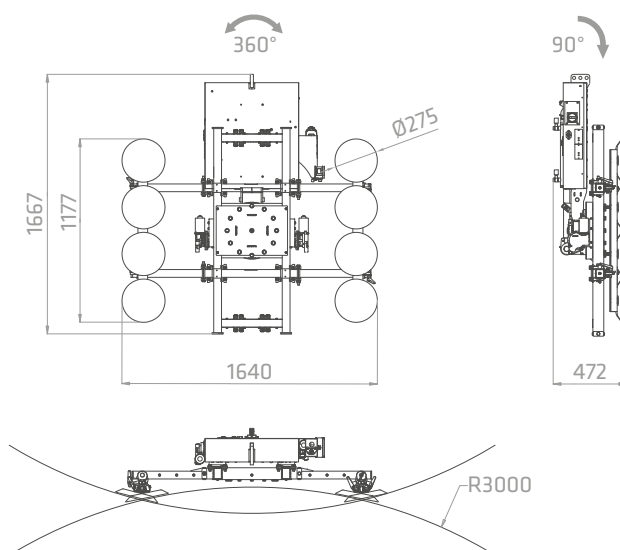

 800 kg

 800 kg

 285 kg



tecnocat
Modular Design

Es un equipo totalmente modular y puede montar diferentes parrillas para vidrios de distintos pesos y dimensiones pudiendo llegar hasta los 1500kg.

También admite parrillas para vidrio curvo, es decir con un solo equipo se puede trabajar en función de casi cualquier demanda y especificación.

Dispone de doble circuito de vacío de seguridad para la manipulación e instalación de vidrio en obra, según la norma EN-13155.

This is a totally modular equipment and can assemble different grids for glass of different weights and dimensions up to 1500kg. It also supports curved glass grills, in other words, with a single unit you can work with almost any demand and specification. It has a double safety vacuum circuit for the handling and installation of glass on site, according to the EN-13155 standard.

Battery-operated and can also be powered from the main power supply, it has a 360° endless electric motorized rotation capacity and 0°-90° hydraulic motorized tilting, both of which are very useful for daily on-site installation work and can be used to compensate for any movement required in a very convenient.

 OK

 150 W

 0° - 360° - ENDLESS

 3 m

 OK

 220-240VAC (50-60Hz)

 83 L/min

 0° - 90°

 OK - Running period 12h aprox

