



2500 kg



1342 kg



El equipo es completamente modular y puede configurarse en distintas disposiciones de parrilla, lo que permite trabajar con vidrios de variados pesos y dimensiones. Es capaz de manejar cargas de hasta 5,000 kg y vidrios de tamaños máximos de 3.21 x 12 metros, adaptándose a las necesidades de cada proyecto.

Cuenta con cuatro circuitos de vacío de seguridad diseñado para la manipulación e instalación de vidrio en obra, cumpliendo con los requisitos establecidos por la norma EN-13155.

*The equipment is fully modular and can be configured in various grill layouts, enabling the handling of glass with different weights and dimensions. It can handle loads of up to 5,000 kg and glass sizes up to 3.21 x 12 meters, adapting to the specific requirements of each project.*

*It features four safety vacuum circuits designed for the handling and installation of glass on-site, complying with the requirements established by the EN-13155 standard.*



OK



400 W



0° - 360° - ENDLESS



OK



3 m



OK



220-440VAC (50-60Hz)



5000 Kg



166 L/min




OK



OK - Running period 12h aprox



OPTIONAL

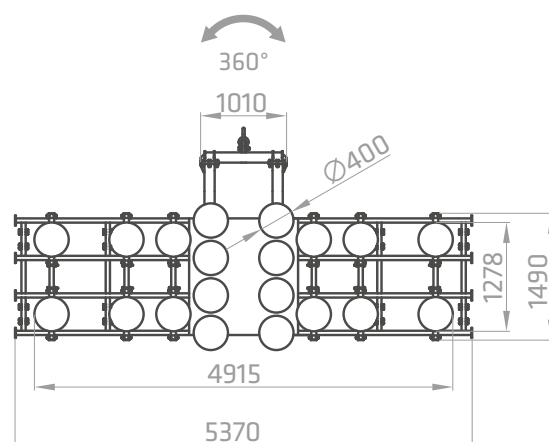



3000 kg



1560 kg



El equipo es completamente modular y puede configurarse en distintas disposiciones de parrilla, lo que permite trabajar con vidrios de variados pesos y dimensiones. Es capaz de manejar cargas de hasta 5,000 kg y vidrios de tamaños máximos de 3.21 x 12 metros, adaptándose a las necesidades de cada proyecto.

Cuenta con cuatro circuitos de vacío de seguridad diseñado para la manipulación e instalación de vidrio en obra, cumpliendo con los requisitos establecidos por la norma EN-13155.

*The equipment is fully modular and can be configured in various grill layouts, enabling the handling of glass with different weights and dimensions. It can handle loads of up to 5,000 kg and glass sizes up to 3.21 x 12 meters, adapting to the specific requirements of each project.*

*It features four safety vacuum circuits designed for the handling and installation of glass on-site, complying with the requirements established by the EN-13155 standard.*



OK



400 W



0° - 360° - ENDLESS



OK



3 m



OK



220-440VAC (50-60Hz)



5000 Kg



166 L/min




OK



OK - Running period 12h aprox



OPTIONAL

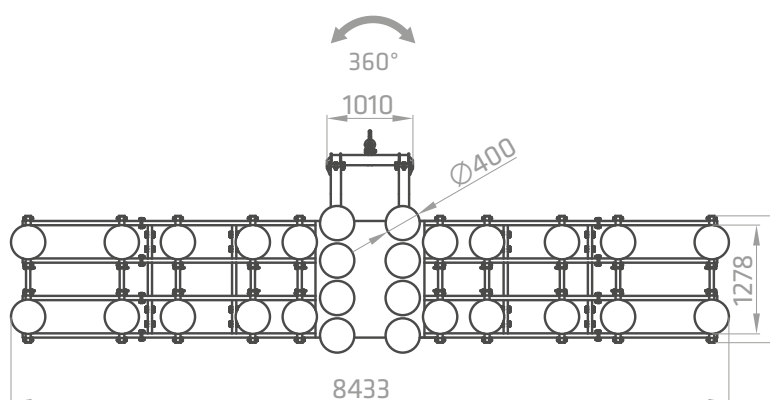




5000 kg



2914 kg

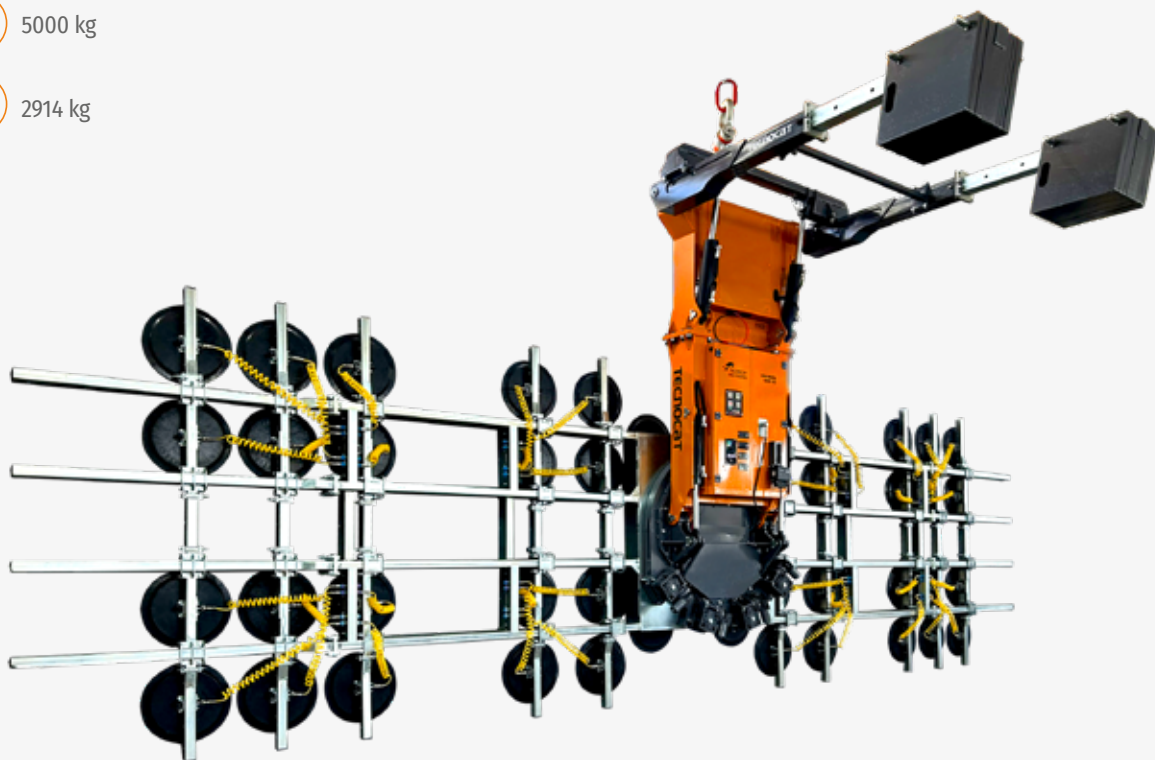

El equipo es completamente modular y puede configurarse en distintas disposiciones de parrilla, lo que permite trabajar con vidrios de variados pesos y dimensiones. Es capaz de manejar cargas de hasta 5,000 kg y vidrios de tamaños máximos de 3.21 x 12 metros, adaptándose a las necesidades de cada proyecto.

Cuenta con cuatro circuitos de vacío de seguridad diseñado para la manipulación e instalación de vidrio en obra, cumpliendo con los requisitos establecidos por la norma EN-13155.

*The equipment is fully modular and can be configured in various grill layouts, enabling the handling of glass with different weights and dimensions. It can handle loads of up to 5,000 kg and glass sizes up to 3.21 x 12 meters, adapting to the specific requirements of each project.*

*It features four safety vacuum circuits designed for the handling and installation of glass on-site, complying with the requirements established by the EN-13155 standard.*



OK



400 W



0° - 360° - ENDLESS



OK



3 m



OK



220-440VAC (50-60Hz)



5000 Kg



166 L/min



OK



OK - Running period 12h aprox



OPTIONAL

