



SKIPPER GL

Stair-Climber Glazing Robot

Skipper GL is a glass manipulator, also known as a glazing robot, ideal for transporting and installing glass and glazed panels, even large ones.

It is equipped with motorized tracks that can overcome steps of any type, stair ramps, ascents and descents up to 35 degrees, even outdoors and on uneven terrain.

Practical, compact, and powerful, it transports up to 300 kg (661 lbs) with minimal effort, combining agility and efficiency in every operation.

IDEAL FOR

Large glass panels, insulated glass, security doors and windows.

Available with both manual and electric suction cups.

**EASY GLASS
INSTALLATION**

**DESIGNED ACCORDING
TO THE PRINCIPLE OF
FAVORABLE LEVERAGE**

**TRACKS SUITABLE
FOR ALL CONSTRUCTION
SITES AND SURFACES**

Suitable for construction sites and indoor use.

Skipper GL is compact and powerful. It moves on special rubber tracks that allow operation on virtually any surface.

It is practical and easy to use.

Thanks to its compact size, it can also be used indoors to install glass panels and glazing.



CLIMBS STAIRS

Skipper GL allows glass to be moved from one floor to another with no effort and maximum safety.

Thanks to its adjustments, it is possible to find the most comfortable working position in any situation, allowing a single operator to move the glass from one floor to another effortlessly.





WITH MOTORIZED TILTING ARM


Skipper GL allows the glass panel to rotate in both directions and can rotate it 180 degrees, as well as move it forward and backward.

The suction cups are adjustable in width and height, allowing them to adapt even to very large panels.

Thanks to the wheeled base, it is easy to move on flat ground without using the tracks, when the surface allows it.



SKIPPER GL

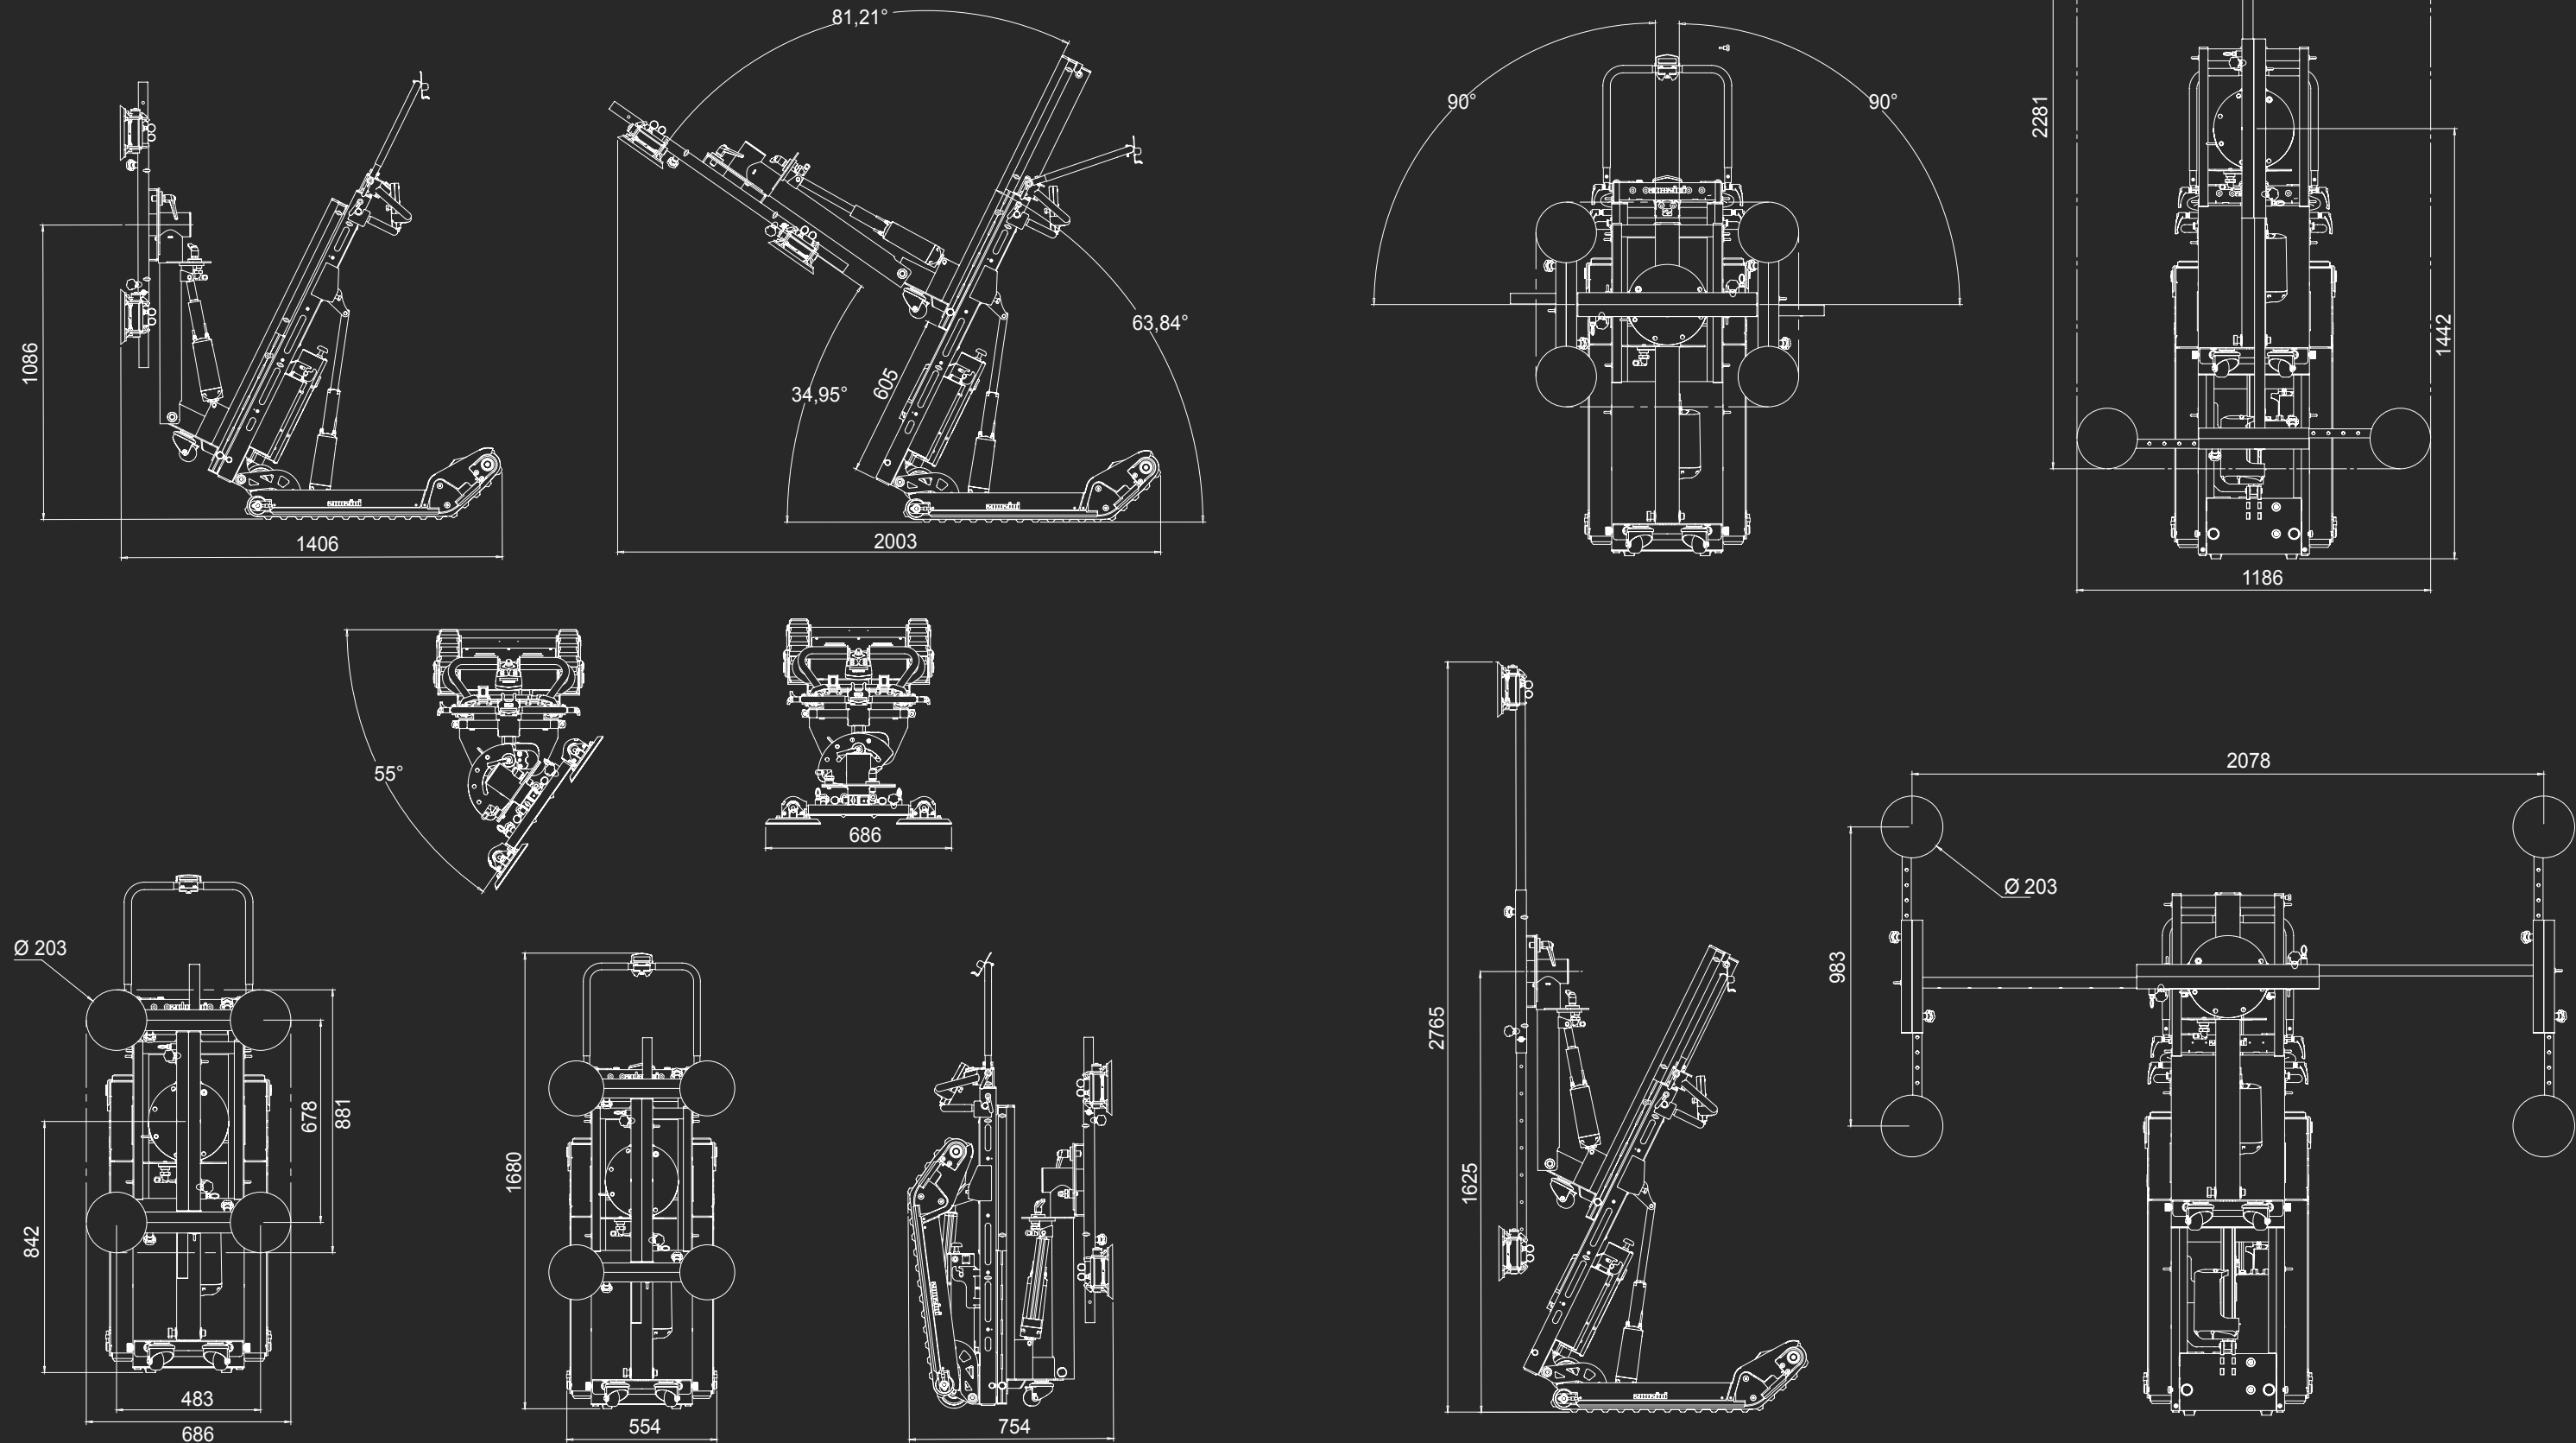

TECHNICAL DATA

Load capacity	200 kg (441 lb)
	300 kg (661 lb)
Weight without battery	178 kg (393 lb)
Battery weight	9 kg (20 lb)
Battery type	Li-ion 55Ah – 24V
Battery autonomy*	approximately 2.000 steps
Battery charging time**	Li-ion: 6 ore
Track travel speed	Load capacity 200 kg (441 lb): 0.25 m/s (0.82 ft/s)
	Load capacity 300 kg (661 lb): 0.15 m/s (0.49 ft/s)
Maximum glass dimensions	Width: 3 m (9 ft 10 in)
	Height: 2.5 m (8 ft 2,4 in)
Protection rating	IP54

**Battery range also depends on several external factors that may reduce it, such as the operating temperature of the trolley, the battery storage temperature, and the condition of the battery depending on compliance with charging cycles. The estimated range is indicative and not binding.*

*** The stated charging time is indicative and not binding.*

*Important: Zonzini s.r.l. reserves the right to make changes, even substantial ones, to all products without prior notice. The data provided are purely indicative and not contractually binding. For more detailed technical information, please contact the manufacturer's customer service by email.**

